

Short Operating Instruction for Digital Recorder EDIC-mini Tiny16 B43-300h/600h/1200h


Overlook

Miniature digital voice recorder Edic-mini Tiny16 B43 is intended for professional audio voice recording into built-in flash memory. The recordings can be further uploaded onto a computer. The recorder can be used simultaneously as a voice recorder when recording messages and a flash media when storing and transferring data of any standards.

Specifications:

- Metallic case;
- VAS (Voice Activating System) to compress pauses while recording;
- Circular recording mode;
- Built-in real time clock;
- Timers to turn the recorder on at the preset time;
- Information protection system;
- AGC system to adjust the amplification according to the external acoustic conditions.

Recorder's Appearance

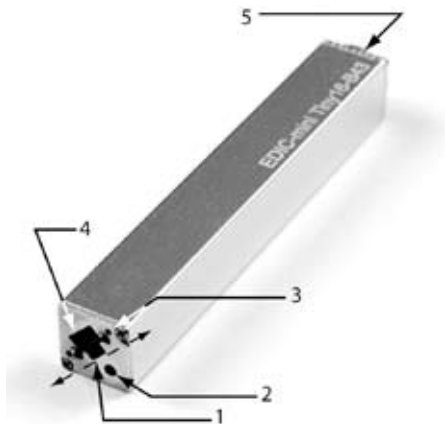

Recorder's Appearance

1. Switch: – «Stop»; – «Record»
2. Microphone
3. LED
4. USB connector
5. Lid

Supplied Software makes it possible to:

- Save the recorded messages onto the PC as standard sound files;
- Restore compressed pauses when uploading files onto the drive;
- Set the DVR parameters;
- Apply password protection of the access to the recorder's settings;
- Update software.

Technical Characteristics:

- Battery life in record mode (8 KHz, without compression) at the battery capacity 1000 mAh: up to 80 hours;
- Battery life in stand-by mode: up to 9 months;
- Battery life in record mode with VAS (audio signals below threshold): up to 11 days;
- Last digits in the models' names specify the maximum recording duration in hours (built-in memory capacity) for the recording mode: sample rate 8 kHz, and 2 bit ADPCM:
 - – 300h: 300 hours (2 Gb);
 - – 600h: 600 hours (4 Gb);
 - – 1200h: 1200 hours (8 Gb).
- Exchange rate: up to 0, 7 Mb/s;
- Frequency band: 0,1-10 kHz;

- Signal-to-noise ratio: 80 dB;
- Built-in microphone sensitivity: 10–12 m;
- Storage life of built-in flash memory: up to 10 years;
- Battery: AAA;
- Operating temperature range» 0–40 °C;
- Dimensions: 85x13x13 mm;
- Weight (battery not included): 11 g;
- Operating lifetime: 5 years.

Recorder's Functional Testing

Trial Recording.

Snap the Switch (position 1) to “Record” position. When the recorder starts recording, the LED (position 3) flashes five times. While recording, two series of LED flashes show the battery charge and free memory size (see Operational Manual on the shipped CD for more details). To stop the recording, snap the Switch (position 1) to “Stop” position. When the recorder stops recording, the LED (position 3) flashes once. The duration of the last flash can be a dozen seconds depending on the recorder's memory size.

To play back the recording upload the recording

onto a hard drive with the help of “Rec Manager” program (located on the shipped CD).

Battery installation. To install the battery unscrew the lid (position 5) and insert the battery into the case (carefully observe the polarity – the positive battery contact is to be upward). Screw the lid (position 5).

Accessories:

1. Programmable remote microphone with AGC system;
2. RecAdapter (telephone conversation recorder);
3. Knowles-based remote microphone (+10dB).

In Box

1. Recorder;
2. USB cable;
3. Flash drive with Software and Instructions;
4. 2 AAA batteries.

For more details see Operational Manual on the shipped CD (or flash drive). It is also available on our website www.ts-market.com

Manufacturer Warranty Coupon

Warranty: **The Telesystems Company** provides warranty repair for 1 year from the selling date, but not more than 2 years from the manufacturing date.

This warranty is voided if the recorder is:

- improperly used
- mechanically damaged
- received without supplier warranty tag on this document

All questions regarding product exchange and return must be solved with the seller's company according to Protection of Consumers Law.

Digital Recorder EDIC-mini Pro B43

300h

600h

1200h

Number: _____

QC: _____

Selling date: _____

Seller: _____

Address:

TS-Market Ltd.

Building 10/1 Sosnovaya Alleya, Zelenograd, Moscow,
The Russian Federation, 124489

Tel: +7 (495) 638-8800; +7 (495) 651-91-51

(Cell) +7(903) 530-10-01, +7 (909) 638-88-00

Fax: +7 (495) 535-0491

E-mail: support@ts-market.com

<http://www.ts-market.com>

GPS coordinats :

55.98065 N

37.25224 E