

Short Operating Instruction for EDIC-mini Tiny A31 300h/600h/1200h

The EDIC-mini Tiny A31 digital recorder is a professional device that provides high quality voice recording on to built-in flash memory. The recorder can be used for audio recording and as a flash drive for saving files of any formats.

The recorder has:


- USB interface allows high-speed data exchange (up to 0,7 Mb/sec.)
- Voice activation system, which allows to compress pauses while recording
- Built-in real time clock
- Timers, which allow to record automatically at the preset time Information protection system.

Supplied software provides:

- To save recorded messages on a computer's hard drive as standard audio files
- To restore compressed pauses, when saving recordings on a computer's hard drive

- To set the recorder's parameters
- To administrate the recorder's operating
- To update the recorder's software.

Appearance

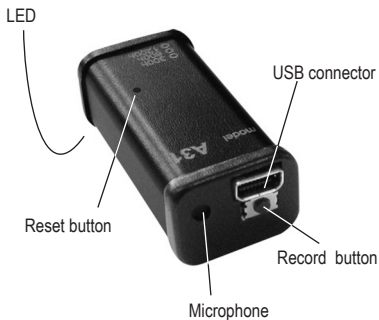

Technical Characteristics

- Recording time with fully-charged rechargeable battery – up to 25 hours;
- Digits in the models' names show the built-in flash memory capacity (A31-300h/600h/1200h):
 - 300h – 17920 min (2Gb);
 - 600h – 35840 min (4Gb);
 - 1200h – 71680 min (8Gb).
- (2 bit ADPCM, sampling rate 8 kHz);
- Data exchange speed: 0.7 Mb/sec
- Temperature range: 0-40°C;
- Bandwidth while recording: 100-10,000 Hz;
- Sound/noise ratio: -72 Db;
- Built-in microphone operating distance: 7-9 m;
- Flash memory's shelf life: not less than 10 years;
- Period of time needed to charge rechargeable battery: 3 hours;
- Rechargeable battery: 75 mA/h, Li-Pol;
- Dimensions: 29x15x12mm;
- Weight: not more than 6,5 gram.

Functional test

Trial record. Press the Record button and keep it pressed for about two seconds. The recorder's LED will flash 5 times. To stop recording, keep the Rec button pressed for 2 seconds. When the recorder stops recording, the LED will flash once. The duration of the flashes can be different depending on the recorder's memory size. When recording, the sequences of LED flashes show the level of charge of the battery and memory capacity (you can find a more detailed description in the Operating Instruction).

You can listen to the recording only after uploading the recordings to the computer's hard drive by means of the program RecManager (you will find it on the applied software CD).

Charging the Recorder

Connect the recorder to a computer USB port using the shipped USB cable. The recorder will start charging automatically. While charging, the recorder's LED flashes gradually with a 5 seconds interval. After the rechargeable battery is fully charged, the LED will flash continuously.

Box Contents

- Voice recorder
- USB cable
- Software CD or Flash drive
- Instructions
- Warranty Coupon

Additional Accessories

- External microphone with compressor

*The full version of the Operating Instruction is in the build-in memory of the recorder. You can also find it at our website www.ts-market.com

Designed and manufactured by the
Telesystems Ltd.

The Manufactory Warranty Coupon

Warranty: The Telesystems Company provides warranty repair for 1 year from the selling date, but not more than 2 years from the manufacturing date.

This warranty is voided if the recorder is:

- improperly used
- mechanically damaged
- received without supplier warranty tag on this document

All questions regarding product exchange and return must be solved with the seller's company according to Protection of Consumers Law.

Edic-mini Pro model A31

- EM Pro A31 - 300 h
- EM Pro A31 - 600 h
- EM Pro A31 - 1200 h

Number _____

QC _____

Selling date _____

Seller _____

Address:

TS-Market Ltd.

**Building 10/1 Sosnovaya Alleya, Zelenograd, Moscow, The
Russian Federation, 124489**

Tel: +7 (495) 638-8800; +7 (495) 651-91-51

(Cell) +7 (903) 530-10-01, +7 (909)638-88-00

Fax: +7 (495) 535-0491

E-mail: support@ts-market.com

<http://www.ts-market.com>