

## **EDIC-mini Tiny model A34**

The Edic-mini Tiny A34 is intended for professional speech recording with the possibility of uploading recordings onto a computer.

### **Tiny series characteristics are:**

- Miniature size
- Low consumption current
- Built-in USB interface (exchange speed up to 5.5 Mb)
- High quality recording
- High sensitivity microphone (operating distance 7-9 m)
- Simplified functionalities (recording only, the recorder does not have a headphones' connector, to play the recordings back you need a computer) and a one button control, the recorder's LED indicates recorder's operating modes

## **Main Capabilities**

- Voice Activating System that allows to decrease memory consumption;
- Wide recorded frequency band – up to 100-10,000 Hz;
- Timers to record automatically for non personal operation;
- Possibility to use the recorder as a flash drive as well as for voice recording. The user can distribute the memory size of the flash drive and that of the recordings;
- Password protection;
- Connection to a computer USB port with a supplied USB cable;
- Connector for an external microphone.


## **Characteristics:**

- Wooden case;
- Dimensions: 41x38x12 mm;
- Weight : <10g;
- Operating temperature range: 0...+40 °C (32...+104 °F);
- Recording mode – mono;
- Built-in microphone (operating distance 7-9 m);
- Recording duration up to 1,200 hours;
- Battery life:
  - in record mode (sampling rate 8 K Hz, without compression): 42 hours;
  - in record mode with VAS (audio signals below threshold): 140 hours;
  - in stand-by mode: up to 3.5 months
- Power supply: 85 mAh built-in rechargeable battery;
- Battery is charging from a computer USB port.

## **In Box:**

- Recorder;
- USB cable;
- Software CD or Flash drive;
- Instructions.

## Appearance

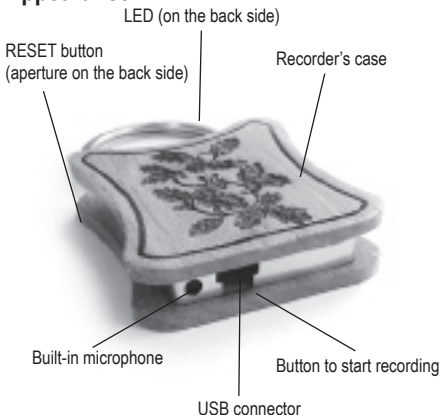

## Turning the Recorder on

To activate the recorder, keep the recorder's button pressed for 2-3 seconds. The recorder will start self testing. When the recorder finishes self testing, the recorder's LED (4) flashes 3 times continuously and flashes for the fourth time after a pause. The duration of the fourth flash can be a dozen seconds depending on the recorder's memory size.

Before usage, completely charge the recorder's battery.

## Start/Stop Recording

To start/stop recording, keep the button pressed for 2 seconds. When the recorder starts recording, the LED flashes five times. When the recorder stops recording, the LED flashes once. The duration of the last flash can be a dozen seconds depending on the recorder's memory size.

While recording, the sequences of LED flashes show the level of charge of the battery and memory capacity:

the first sequence:

- 1 flash – fully charged,
- 2 flashes – there is enough charge for work,
- 3 flashes mean that the battery is almost discharged (it should be charged)

and the second sequences show the free memory capacity:

- 1 flash – 76%-100%,
- 2 flashes – from 50% to 75%,
- 3 flashes – from 25% to 50%,
- 4 flashes – from 1% to 25%.

To evaluate the rechargeable battery life in different modes, use the data from the Table 1 (the data are for EDIC-mini Tiny A34-150h).

Table 1.

Compression Sampling rate	Without compression	uLaw	ADPCM 2-bits	ADPCM 4-bits
	Recording duration (hours)			
5.5	50	44	39	42
8	42	35	28	33
11	31	28	26	27
16	25	21	19	21
22	21	17	15	15

## Charging the Recorder

Connect the recorder to a computer USB port. The recorder will start charging automatically. Keep the recorder connected to the computer USB port for 3 hours (while the computer is on) to completely charge the recorder's rechargeable battery. While charging, the recorder's LED is flashing gradually with a 5 seconds interval. After the rechargeable battery is fully charged, the LED will flash continuously and gradually.

Don't keep the Li-pol battery discharged. Charge the recorder 1-2 times every two months even if it is not in use.

Designed and manufactured by the  
Telesystems Ltd.

### **The Manufactory Warranty Coupon**

Warranty: The Telesystems Company provides warranty repair for 1 year from the selling date, but not more than 2 years from the manufacturing date.

This warranty is voided if the recorder is:

- improperly used
- mechanically damaged
- received without supplier warranty tag on this document

All questions regarding product exchange and return must be solved with the seller's company according to Protection of Consumers Law.

#### **Edic-mini Tiny model A34**

150 h.     300 h.     600 h.

1200 h.     2400 h.

Number \_\_\_\_\_

QC \_\_\_\_\_

Selling date \_\_\_\_\_

Seller \_\_\_\_\_

**Address:**

**TS-Market Ltd.**

**Building 10/1 Sosnovaya Alleya, Zelenograd, Moscow, The  
Russian Federation, 124489**

**Tel: +7 (495) 638-8800; +7 (495) 651-91-51**

**(Cell) +7 (903) 530-10-01, +7 (909) 638-88-00**

**Fax: +7 (499) 735-04-91**

**E-mail: [support@ts-market.com](mailto:support@ts-market.com)**

**<http://www.ts-market.com>**